



POWERTRONICS PVT. LTD.

HIPOTRONICS

8000 PL Series

60 kV Module Portable DC Hipot Testers

■ **The 8000PL Series** DC Hipot Testers offer a 60 to 300 kV range in a convenient cascade design. These systems are air insulated, with each module individually capable of producing 60 kV at 16 mA. The standard power rating is 2 kW. Low leakage measurement, even with fluctuating line voltage, is possible with the 1% line regulator. The design also offers reversible polarity.

This modular (expandable) construction favors the use of these portable testers in situations formerly requiring large mobile units. For example, when field-testing, each technician can be equipped with one controller and as many modules as routine tests require. Then, for any non-routine higher voltage tests, additional modules may be assembled at the test site. For example, a 240 kV test requires one controller and four modules. Each unit consists of a control case and one or several 60 kV modules up to the required voltage. For expansion above three modules, a HV expansion kit is required. This kit contains an anti-corona toroid rated for up to 300 kV, plus base extension legs and guy straps for support. The lightweight fiberglass control case includes all operating controls and meters, plus storage area for the base grounding probe, output resistor, and interconnecting cables.



FEATURES

- ☑ **Expandable** from 60 kV to 300 kV
- ☑ **Rugged, portable and modular** construction
- ☑ **High current** output for testing large loads
- ☑ **Reversible polarity**
- ☑ **Ripple <0.2% per mA**
- ☑ Analog kilovolt and current meters
- ☑ **Zero start interlock** and external interlock provisions for safety during operation
- ☑ **Anti-corona** toroid
- ☑ **Compact control** unit allows remote positioning ideal for field use
- ☑ **Momentary current reversal switch**
- ☑ **Optional high voltage shorting solenoid**

BENEFITS

Ideal for field testing – lightweight, compact, and rugged make it suitable for field testing

Quick and Easy - a modular system limits the setup time and user-friendly controls make it simple to use

Modular Construction - bring only the number of modules necessary for the required voltage

Easily Transportable - Air-insulated modules make it light weight and simple to transport in a van or pickup truck


Accurate Leakage Current Measurements -while guard circuit eliminates stray leakage currents

APPLICATIONS


DC Hipot testing of:

- **Cable**
- **Electrical switchgear**
- **Motors**
- **Generators**
- **Other electrical apparatus**

CONTROL PANEL

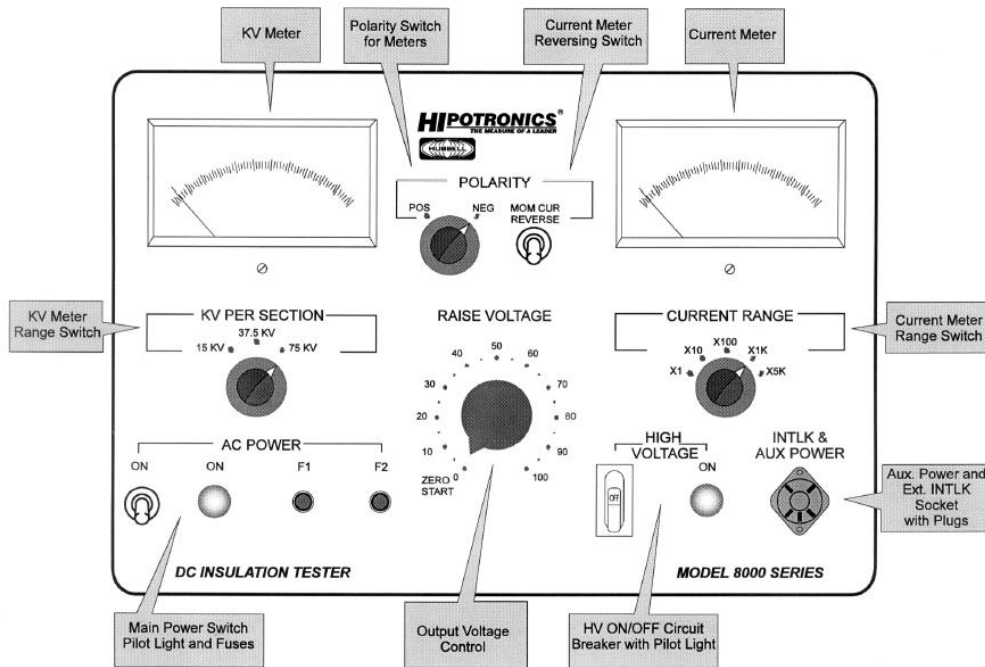

MODULE ASSEMBLY

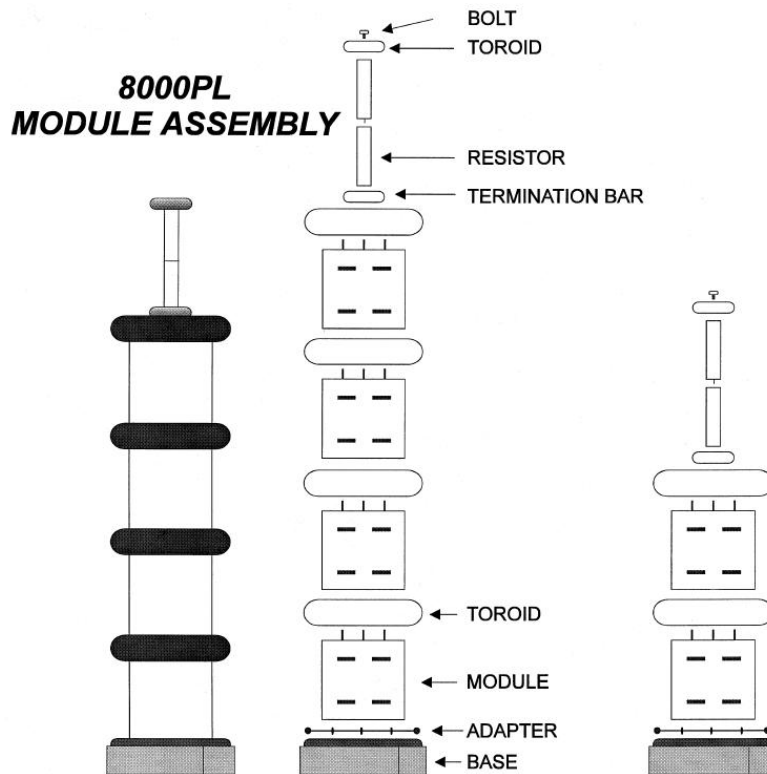



POWERTRONICS PVT. LTD.

HIPOTRONICS

TECHNICAL SPECIFICATIONS

General

Table with 6 columns: Model Number, Input Voltage & Frequency, Number of Modules, Output Voltage (kV DC), Output Current (mA), Duty Cycle, Output Polarity, Output Ripple, Metering. Rows include 8060PL, 8120PL, 8180PL, 8240PL, 8300PL.

Weights and Dimensions (W x H x D, net weight, ship weight)

Table with 4 columns: Component, Dimensions, Net Weight, Ship Weight. Rows include Controller and Module.

SCOPE OF SUPPLY

- Qty. X 8KPL-MOD 60 kV Module (quantity depends upon model number)
Qty. 1 8KPL-CONT Controller
Qty. 1 DA13-280 Ground stick, 120 kV max
Qty. 1 8KPL-EXT-HV HV expansion Kit#
Qty. 1 Epoxy Resistor Qty. 1 Input Line Cord, 10 ft (3 m)
Qty. 2 Ground Cable, 15 feet (4.6 m)
Qty. 1 Interconnection Cable, 30 feet (9.1 m)
Qty. 1 Calibration Certificate
Qty. 1 User's Manual
Supplied ONLY with 8180PL, 8240PL and 8300PL

ORDERING INFORMATION

Table with 2 columns: System, Model Number. Rows include 60 kV, 16 mA DC Hipot (8060PL-*), 120 kV, 8 mA DC Hipot (8120PL-*), 180 kV, 5.5 mA DC Hipot (8180PL-*), 240 kV, 4.1 mA DC Hipot (8240PL-*), 300 kV, 3.1 mA DC Hipot (8300PL-*).

Accessories

Table with 2 columns: Accessory, Model Number. Rows include DC Hipot Controller, 8000PL Series (8KPL-CONT), 60 kV Module Kit (8KPL-MOD), High Voltage Expansion Kit (8KPL-EXT-HV), Ground stick, 120 kV max. (DA13-280), Shorting Switch, 175 kV - 1 MV (8175-SS), Line Regulator, 1%, 2 kW (8KPL-LR2).



POWERTRONICS PVT. LTD. AN ISO 9001 : 2015 COMPANY

TAURUS POWERTRONICS PVT LIMITED

Corporate Off.: No. 26, "Mahadimane", 12th Main, 1st Block, Rajajinagar, Bengaluru - 560 010. INDIA., Tel : + 91 80 23012301
Email : info@tauruspowertronics.com, care@tauruspowertronics.com, WhatsApp : +91 73496 44344
Sales & Service Off.: No. 648/54, KLE College 2nd Block, Rajajinagar, Bengaluru - 560 010. INDIA , Tel : + 91 80 2352 2136/74

BENGALURU
DELHI
KOLKATA
MUMBAI