






MULTI HCL-36UX

Digital Clamp Tester
AC load current measurements for high voltage circuit


-  Measurement Value
-  Measurement time
-  Temperature and humidity
-  Measurement point



Substation



Distribution line

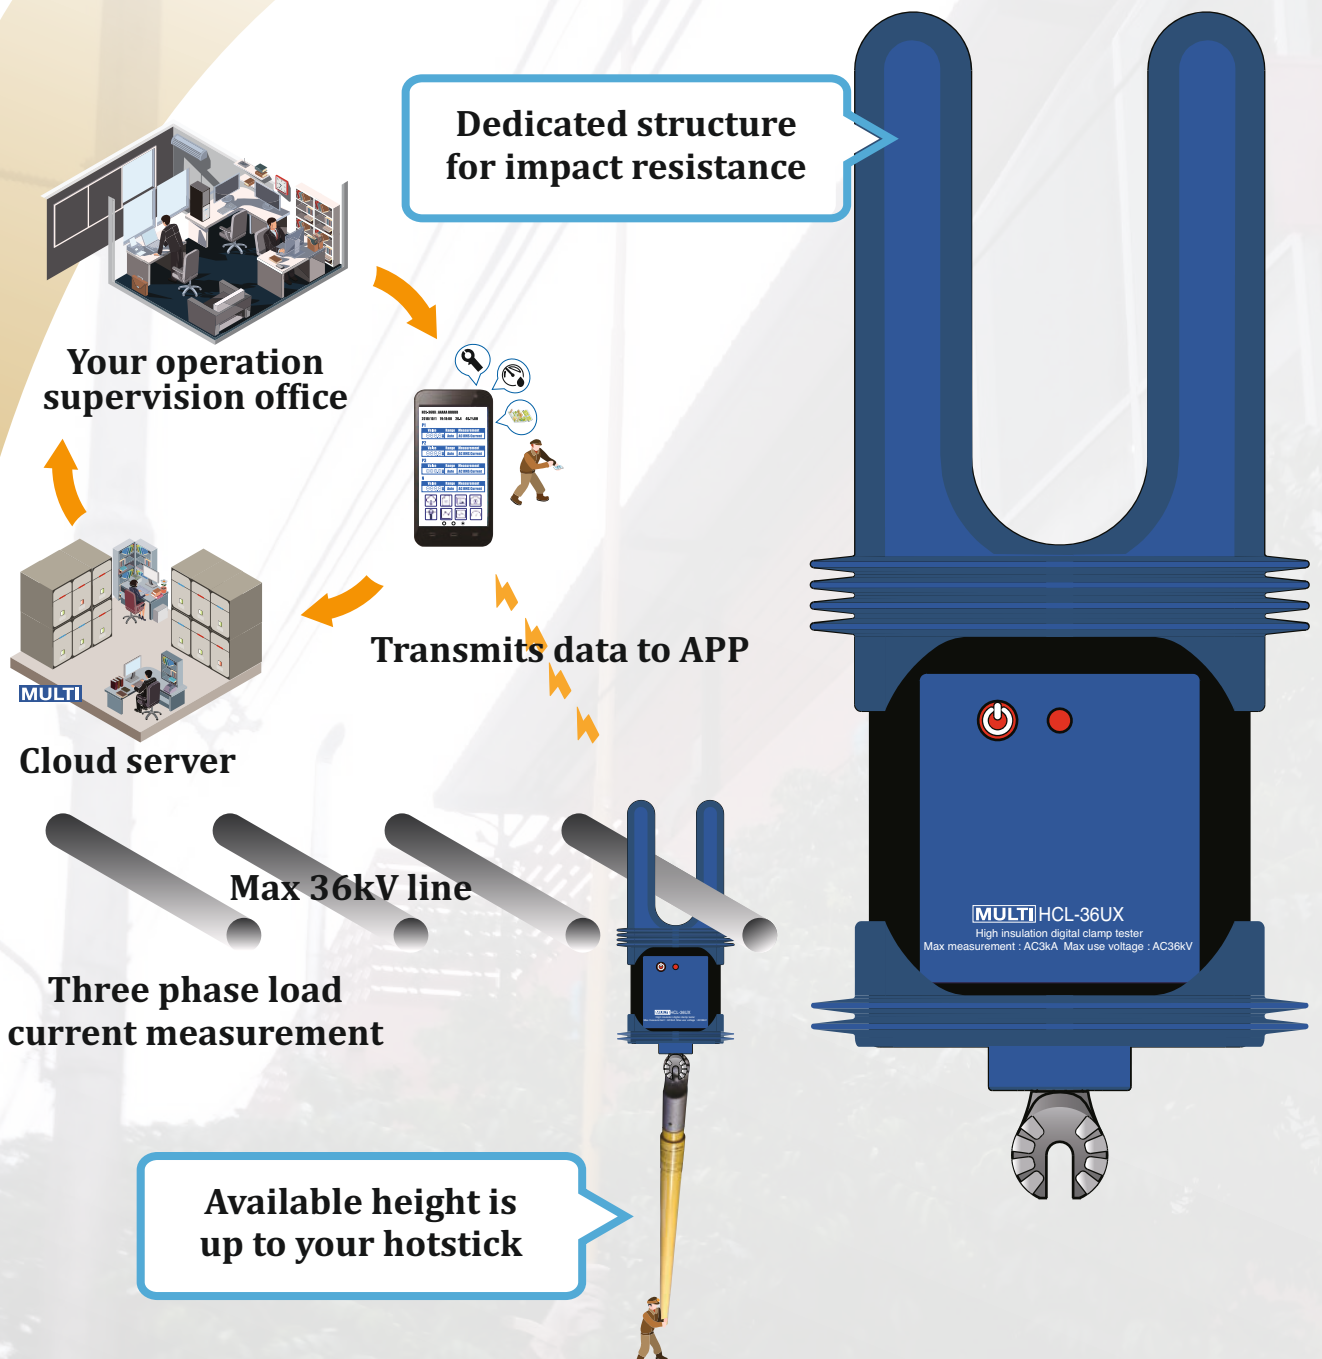

HCL-36UX


Digital Clamp Current Tester for High Voltage

Communication method:Blue tooth 4.2



Specification

Measurement	: AC Load current
Range	: AC 0.1A~3000A
Range switchover	: 2 range auto (330A/3000A)
Frequency range	: 50~60Hz
Resolution	: 0.1A(0-329.9A), 1A(330-3000A)
Accuracy	: $\pm 1\%rdg \pm 2dgt$
AC conversion	: True RMS value by analog calculation
A/D conversion	: Integral
Sample rate	: 2 time/1s
Insulation Resistance	: More than 100MO by DC1kV insulation tester (Between CT~Universal connector)
Withstanding Voltage	: 70kV/5min (Between CT~Universal connector)
Operating circuit voltage	: AC36kV(50/60Hz)
Operating Temperature	: -20~60°C 20~96% When using a lithium battery (without condensation)
Storage Temperature	: 5~45°C 20~96% When using alkaline battery (without condensation)
Temperature/Humidity display	: Approximate value by our APP "M-tracer"
CT shape	: Type-U
CT inside diameter	: 55.4mm
Power supply	: LR6*4ea
Motion	: Power On/Off Other operations: On the APP or Display unit
Low battery Voltage indication	: By LED flashing
Weight	: 1550g(including battery)
Size	: 400*179.6*90.4mm

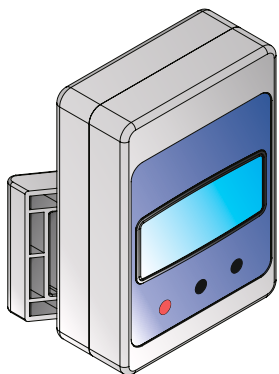

MDU-100X

Display unit

Communication method:Blue tooth 4.2



TAURUS POWERTRONICS PVT LIMITED

Corporate Off.: No. 26, "Mahadimane", 12th Main, 1st Block, Rajajinagar, Bengaluru - 560 010. INDIA., Tel : + 91 80 23012301
Email : info@tauruspowertronics.com, care@tauruspowertronics.com, WhatsApp : +91 73496 44344
Sales & Service Off.: No. 648/54, KLE College 2nd Block, Rajajinagar, Bengaluru - 560 010. INDIA.

BENGALURU
DELHI
KOLKATA
MUMBAI